

MSZ-AP R32

Elegance Wall Mounted System

Inverter Heat Pump

Mseries

The Elegance Series wall mounted system delivers excellent flexibility and energy efficiency for air conditioning projects.

With an extensive range of capacities from 1.5kW to 7.1kW and connection to multi-split systems as well as single splits, the Elegance series is a great fit for a huge array of applications from small residential to light commercial installations.

R32

Key Features & Benefits:

- Compact design
- Built-in Wi-Fi interface allowing control through our multi award winning MELCloud app. Also compatible with Amazon Alexa and Google Home
- 30m pipe run (6kW & 7.1kW models)
- Easy operation through backlit controller with 7 day timeclock



R32




MSZ-AP INDOOR UNITS		MSZ-AP15VGK	MSZ-AP20VGK	MSZ-AP25VGK	MSZ-AP35VGK	MSZ-AP42VGK	MSZ-AP50VGK	MSZ-AP60VGK	MSZ-AP71VGK
CAPACITY (kW)	Heating (nominal)	1.7 (1.2-3.0)	2.5 (0.5-3.5)	3.2 (1.0-4.1)	4.0 (1.6-4.3)	5.4 (1.3-6.0)	5.8 (1.4-7.3)	6.8 (2.0-8.6)	8.0 (2.2-10.3)
	Cooling (nominal)	1.5 (0.9-2.7)	2.0 (0.6-2.7)	2.5 (0.9-3.4)	3.5 (1.1-3.8)	4.2 (0.9-4.5)	5.0 (1.4-5.4)	6.1 (1.4-7.3)	7.1 (2.0-8.7)
	Heating (UK)	-	2.06 (0.4-2.9)	2.64 (0.8-3.4)	3.3 (1.1-3.8)	4.45 (1.1-4.9)	4.78 (1.2-6.0)	5.6 (1.6-7.1)	6.68 (1.8-8.6)
	Cooling (UK)	-	1.98 (0.6-2.7)	2.48 (0.9-3.4)	3.47 (1.1-3.8)	4.17 (0.9-4.5)	4.95 (1.4-5.3)	6.05 (1.4-7.2)	7.04 (2.0-8.6)
SHF (nominal)	-	0.80	0.92	0.88	0.77	0.74	0.83	0.77	
COP / EER (nominal)	-	4.17 / 4.35	4.10 / 4.17	3.88 / 3.54	3.62 / 3.23	3.63 / 3.23	4.07 / 3.84	3.82 / 3.53	
SCOP / SEER (BS EN14825)	-	4.10 / 8.60	4.80 / 8.60	4.70 / 8.60	4.70 / 7.80	4.70 / 7.80	4.60 / 7.40	4.60 / 7.20	
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	-	A+ / A+++	A++ / A+++	A++ / A+++	A++ / A++	A++ / A++	A++ / A++	A+ / A++
AIRFLOW (l/s)	Heating - SL0-Lo-Mi-Hi-SHI	62-73-83-100-113	62-73-83-100-122	82-98-122-148-215	82-98-122-148-215	88-102-128-157-233	93-108-137-167-233	180-223-257-290-338	170-192-220-255-320
	Cooling - SL0-Lo-Mi-Hi-SHI	58-65-77-92-107	58-65-77-92-115	82-98-118-145-190	82-98-118-145-190	90-108-128-155-190	100-120-140-167-210	157-183-220-267-315	160-192-220-255-310
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")	12.7 (1/2")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating - SL0-Lo-Mi-Hi-SHI	21-26-30-35-40	21-26-30-35-42	19-24-34-39-45	19-24-31-38-45	21-29-35-40-45	28-33-38-43-48	30-37-41-45-48	30-37-41-45-51
	Cooling - SL0-Lo-Mi-Hi-SHI	21-26-30-35-40	21-26-30-35-42	19-24-30-36-42	19-24-30-36-42	21-29-34-38-42	28-33-36-40-44	30-37-41-45-48	30-37-41-45-49
SOUND POWER LEVEL (dBA)	-	59	60	57	57	57	58	65	65
DIMENSIONS (mm)	Width x Depth x Height	760 x 178 x 250	760 x 178 x 250	798 x 219 x 299	798 x 219 x 299	798 x 219 x 299	798 x 219 x 299	1100 x 257 x 325	1100 x 257 x 325
WEIGHT (kg)	-	8.2	8.2	10.5	10.5	10.5	10.5	16	17
ELECTRICAL SUPPLY	-	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)	-	6	6	6	6	6	6	6	6
INTERCONNECTING CABLE No. CORES	-	4	4	4	4	4	4	4	4

Note: MSZ-AP15VGK only available with R32 MXZ Multi-Split outdoor units.

MUZ-AP OUTDOOR UNITS		MULTI-SPLIT ONLY	MUZ-AP20VG	MUZ-AP25VG	MUZ-AP35VG	MUZ-AP42VG	MUZ-AP50VG	MUZ-AP60VG	MUZ-AP71VG
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	-	48 / 47	48 / 47	50 / 49	51 / 50	52 / 52	57 / 56	55 / 55
SOUND POWER LEVEL (dBA)	Cooling	-	59	59	61	61	64	65	65
WEIGHT (kg)	-	-	31	31	31	35	40	40	55
DIMENSIONS (mm)	Width x Depth x Height	-	800 x 285 x 550	800 x 285 x 550	800 x 285 x 550	800 x 285 x 550	800 x 285 x 714	800 x 285 x 714	840 x 330 x 880
ELECTRICAL SUPPLY	-	-	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE	-	-	Single	Single	Single	Single	Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	-	0.60 / 0.46	0.78 / 0.60	1.03 / 0.99	1.49 / 1.30	1.60 / 1.55	1.67 / 1.59	2.12 / 2.01
	Heating/Cooling (UK)	-	0.52 / 0.38	0.70 / 0.50	0.93 / 0.83	1.34 / 1.09	1.44 / 1.29	1.51 / 1.33	1.91 / 1.68
STARTING CURRENT (A)	-	-	3.2	3.6	4.7	6.6	7.0	7.4	9.3
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	-	3.2 / 2.6 [7.0]	3.6 / 2.9 [7.06]	4.7 / 4.5 [8.46]	6.6 / 5.8 [9.6]	7.0 / 6.9 [13.6]	7.4 / 7.1 [14.0]	9.3 / 8.8 [16.4]
FUSE RATING (BS88) - HRC (A)	-	-	10	10	10	10	16	16	20
MAINS CABLE No. CORES	-	-	3	3	3	3	3	3	20
MAX PIPE LENGTH (m)	-	-	20	20	20	20	20	30	30
MAX HEIGHT DIFFERENCE (m)	-	-	12	12	12	12	12	15	15
CHARGE REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675) - 7m	-	-	0.55 / 0.38	0.55 / 0.37	0.55 / 0.37	0.70 / 0.47	1.00 / 0.68	1.05 / 0.71	1.50 / 1.02
MAX ADDITIONAL REFRIGERANT (kg) / CO ₂ EQUIVALENT (t) - R32 (GWP 675)	-	-	0.26 / 0.18	0.26 / 0.18	0.26 / 0.18	0.26 / 0.18	0.26 / 0.18	0.30 / 0.21	0.30 / 0.21

DIMENSIONS

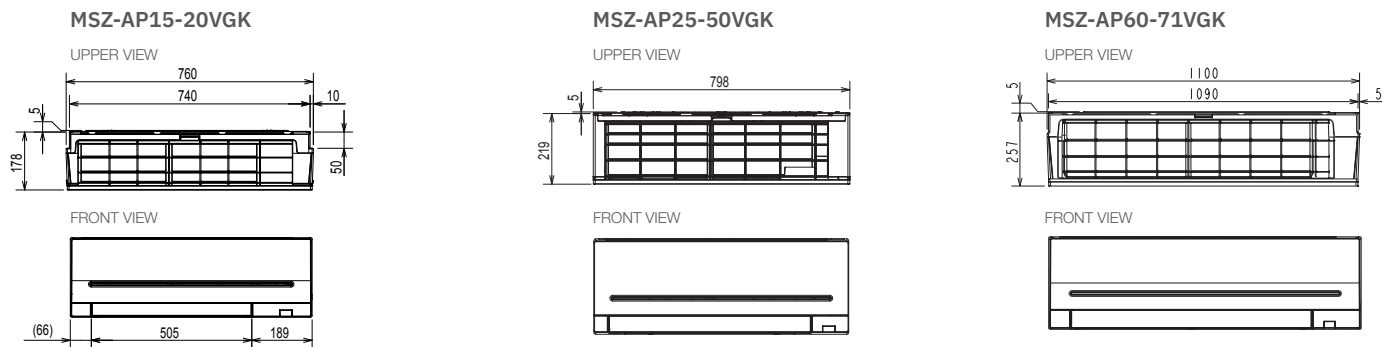

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
 IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2021. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of April 2021

